



SKYLUX^{G2}

Highbays


4POWER
Switchable
Modes


DIM
0-10V
Dimming


IP65
Ingress
Protection
Rating


IK08
Impact
Rating


50,000hr
Expected
Lifetime


5yr
Warranty

A proven solution.

SKYLUX G2 is an established and proven LED highbay solution offering excellent performance and reliability in commercial, industrial and retail applications.

Features

- Power switchable
- High lumen efficacy
- Optional DALI convertor available
- Diecast aluminium housing
- Various accessories available

Benefits

- Reduced SKUs and inventory levels
- Enhanced energy savings
- Easy system integration
- Improved heat dissipation
- Extended application options

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
75W	11250 lm	150 lm/W	5000K	Ø300 x 173mm	3.00kg	2002090	SKYLUX120W-G2
80W	12000 lm	150 lm/W					
100W	15000 lm	150 lm/W					
120W	18000 lm	150 lm/W					
130W	19000 lm	150 lm/W	5000K	Ø340 x 178mm	4.00kg	2002091	SKYLUX200W-G2
150W	22000 lm	150 lm/W					
170W	25000 lm	150 lm/W					
200W	30000 lm	150 lm/W					

Plus Model

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
75W	14000 lm	190 lm/W	5000K	Ø300 x 173mm	3.00kg	2002093	SKYLUX120W-PL
80W	15000 lm	190 lm/W					
100W	19000 lm	190 lm/W					
120W	22800 lm	190 lm/W					

SPECIFICATIONS
Body Material: Aluminium

Diffuser Material: Polycarbonate (Clear)

Body colour: Black

IP Rating: IP65

IK Rating: IK08

Beam Angle: 110°

CRI: >80 (PLUS 70)

SDCM: <5

Driver: Integral

Power Lead: 1.5m Flex & Plug

Input: 100-277V, 50/60Hz

Electrical Classification: Class 1

Power Factor: >0.9

Protection: Overload / Short Circuit

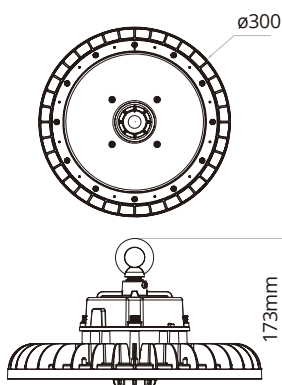
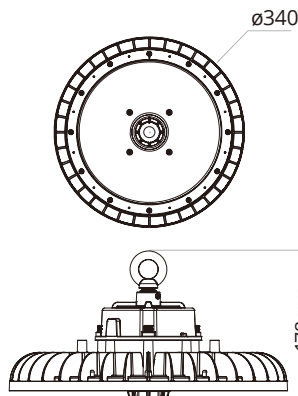
Lifespan: >50,000hrs @Ta25°C (L70)

Operating Ambient Temperature: -35 to 50°C

Smart: KASTA Compatible

Dimming: 0-10V Dimmable

SKYLUX120W-G2

SKYLUX200W-G2
DIMENSIONS

SKYLUX120W-G2

SKYLUX200W-G2
APPLICATIONS

 Warehouses
 Factories
 Sheds
 Industrial
 Large Commercial Spaces

ACCESSORIES
Microwave Motion Sensor
SKYLUX-MS

(SAP 2001901)

- Quick connect
- 12m range with corridor function


Sensor Remote Controller
SKYLUX-REMOTE

(SAP 2001902)

- Required to configure sensor



Surface Mount Bracket
SKYLUX-BRACKET

(SAP 2001899)


DALI Converter
HBAY-DALI-CONV

(SAP 2002095)

- IP65 rated
- Converts product to be DALI dimmable



FIND OUT MORE:

